

Produto | Product

Sistema termostático de banheira com braço ajustável, chuveiro de Ø230mm em ABS e rampa de duche | *Thermostatic bath-shower system for wall mounting with adjustable ABS head shower Ø230mm and shower rail*

138 472 1XX


IMAGEM* | IMAGE*



ESPECIFICAÇÕES | SPECIFICATIONS

- Sistema termostático de banheira com braço ajustável, chuveiro de Ø230mm em ABS e rampa de duche;
- Cartucho termostático;
- Tecnologia para menor consumo de água BRUMA AirEcoDrop®;
- Sistema anticalcário BRUMA ConfortClean®;
- Chuveiro de mão - Elo e chuveiro de Ø250mm com redutor de caudal 6 l/min;
- Limitador de temperatura a 38°C.

- Thermostatic bath-shower system for wall mounting with adjustable ABS head shower Ø230mm and shower rail;
- Thermostatic compact cartridge;
- Water-saving technology BRUMA AirEcoDrop®;
- Anti-limescale system BRUMA ConfortClean®;
- Hand shower - Elo and shower Ø 250mm with flow reducer 6 l/min;
- Safety stop limits the temperature range to 38 °C.



DESENHO DIMENSIONAL | DIMENSIONAL DRAWING

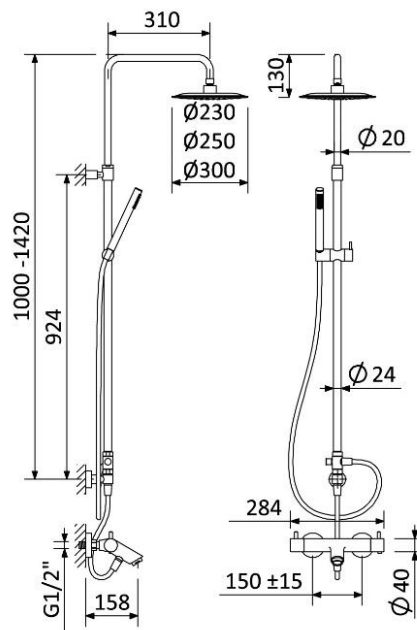


DIAGRAMA CAUDAL | FLOW DIAGRAM

Caudais a 3 bar:

- Saída do chuveiro de mão: 6,0 l/min.
- Saída do chuveiro de parede: 6,0 l/min.
- Saída da bica de banheira: 20,0 l/min.

Flow at 3 bar:

- Outlet handshower: 6,0 l/min.
- Outlet shower head: 6,0 l/min.
- Outlet bath spout: 20,0 l/min.

EFICIÊNCIA HÍDRICA | WATER LABEL **A +**

INSTRUÇÕES DE MANUTENÇÃO | MAINTENANCE INSTRUCTIONS

