




- Stainless steel pump body
- Stainless steel motor shaft
- Stainless steel support base to guarantee a better stability
- Die-cast stainless steel impeller

Model: **BIOX 300/10 AUTO**
 Part number: **N2091040**
 Barcode: **8010583101720**

Submersible pump for waste water and drainage applications. BIOX 300/10 is a professional pump with a stainless steel pump body, motor shaft, impellers and pump base, allowing to leave the pump permanently in water without any risk of corrosion. High reliability thanks to the vortex impeller.

Maximum size of impurities: up to 40 mm

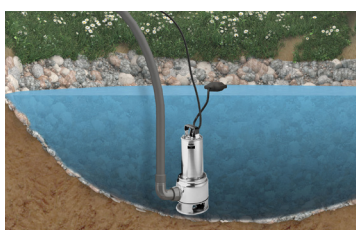

APPLICATIONS

Drainage of cesspools, flood water removal and sewage transfer from sump.
 Emptying of septic tanks

ABSORBED POWER	1300 W	MAX.DEPTH OF IMMERSION	7 m
VOLTAGE	230 V	MAX.TEMPERATURE OF FLUID	40°C
FLOW RATE	21000 l/h	MAX.SIZE OF IMPURITIES	40 mm
MAX. HEAD	11 m	START / STOP	370 mm / 250 mm
RATED CURRENT	5.8 A	WEIGHT	9 kg
PUMP BODY	Stainless Steel	PACKAGING DIMENSIONS	23 x 19.5 x 44 cm
DELIVERY PORT	59,61 mm (2" M)	PCS PER PALLET	40
MINIMUM DRAINING LEVEL	45 mm	ACCESSORIES	Connector